
Quick Guide To Using SVR-1650/1640/950

PRIOR TO USING THE PRODUCT

This is a quick guide covering some of the more frequently used features only. For more accurate and detailed information about the product, please refer to the User's Manual.

BUTTONS

① DVD + RW 2 Jog/Shuttle ③ Record Frame Playback ⑤ Plav/Pause 6 Stop (7) Fast Play Change Direction
@ Menu(up) Copv Power
② Select Channel ③ Search Multi Screen ⑦ Enter 16 PTZ Select Function (9) Move Cursor Left 18 ESC 20 -Move Cursor Down 2 Move Cursor Right 23+ 🙉 USB R Video Out Audio Out

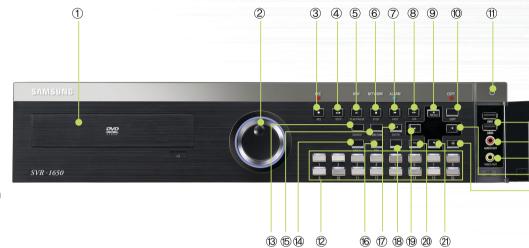



USING JOG/SHUTTLE

Shuttling

Use it to control playback direction (forward/reverse) or speed (2x/4x/8x/Max).

Jog Dial

Use it for frame-by-frame search of video recordings.

1. Live Monitoring



Multi Screen

With each pressing of the Multi Screen button, the screen splits into 16. 4. or 9 screens respectively.



Press a channel button to see the respective channel only on the

2. Recording



Press the REC button to start or stop recording. REC lamp located on the top of the REC button will display recording status. (Caution: the REC button function interacts with the Scheduled Recording settings.)

3. Search/Playback Recordings



1. Press the Search button

2. Select either the Time search or the Event search 3. Enter Date/Time or select an event from the Event List 4. Press the Enter button to play

4. Playback Buttons



• STEP: Play a single frame STOP: Switch to live mode DIR: Switch playback direction



Event search: Select an Event

from the list


5. Hot Function Menu

(26)

(22)

(23)

Press the Function button (Hot Function icons.



*Function-Play feature is enabled only in the Single Screen mode.

PRODUCT FEATURES

www.samsungcctv.com

• PLAY/PAUSE: Start or Pause playback

· Fast : Faster playback speed

(2x / 4x / 8x / Max)

Quick Guide To Using SVR-1650/1640/950

RECORDING FUNCTION

SAMSUNG DVR provides several different recording methods. You can easily select and set any recording method that is most suitable for your environment or needs.

1. Motion Sensor Recording

SAMSUNG DVR can detect any motion on its screen and initiate recording automatically.



Key Button

Select Event Setup Event

· Event Time: always select

3. Scheduled & Event Recording

SAMSUNG DVR can be set to perform recording functions according to a preset date/time schedule using its Scheduled Recording Mode.

Step 1: Select Scheduled & Event Recording



Step 2: Set Schedule Recording



Key Button

- Index: 1~50 different programs can be set Day: designate recording date
- Program: select a recording program (A~T)
- Time: designate recording time
- Set: select APPLY or DELETE

*You can use the 💻 💻 buttons or your mouse wheel to set this: the graphic on your screen only shows Record setting status.

Recommended media

USB memory stick : SanDisk. Transcend

: Mitsubishi, TDK, imation

(1~4X recommended)

: Mitsubishi, TDK, imation

(4~12X recommended)

(512MB recommended)

• DVD+RW

• CD-RW

QUICK

EXIT: ESG

NORMAL QUIC

DVD+RW/CD-RW

USB memory stick

VE: CHANGE

2. Manual & Event Recording

SAMSUNG DVR can be set to use Manual Recording Method(recording preset number of frames per second) and Event Recording Method(recording triggered by an event on the screen) simultaneously.

Step 1: Set Manual & Event Recording mode



Key Button

 Recording mode: select Manual & Event Program: select Program (A~T)

Step 2: Select Record Program



Key Button

Select Record Setup Record Program


▶ Record Setup ▶ Record

 Set recording of Manual & Event (N, E) / Recording Mode(Q)

* You can select the Manual & Event Recording Mode suitable for your environment and use one of the 20 basic programs. (Default mode: program K)



DVD+RW. CD-RW and USB memory stick.



2. Go to COPY menu

4. Copy (Back-up)

- 3. Select Normal or Quick menu
- (Before COPY, Use DVD+RW/CD-RW after executing the DVR Format menu)

HDD content can be stored in other storage medium including



 \mathbf{C}

